

Indoor units for Multi system

INVERTER Wall Mounted

- Powerful airflow
- Double auto swing



Wireless R.C.



ASYG18LF ASYG24LF

Optional parts

Simple Remote Controller: UTY-RSNYM
Wired Remote Controller: UTY-RNNYM
External Connect Kit: UTY-XWZX
Apple Catechin Filter: UTR-FA13-1
Ion Deodorization Filtr: UTR-FA13-2

INVERTER Floor

- 2-Fan & wide airflow



Wireless R.C.



AGYG09LV AGYG12LV AGYG14LV

Optional parts


Simple Remote Controller: UTY-RSNYM
Wired Remote Controller: UTY-RNNYM
External Connect Kit: UTY-XWZX
Apple Catechin Filter: UTR-FC03-2
Ion Deodorization Filtr: UTR-FC03-3
Half Concealed Kit: UTR-STA

INVERTER Floor/Ceiling

- Dual installation
- Double auto swing



Wireless R.C.

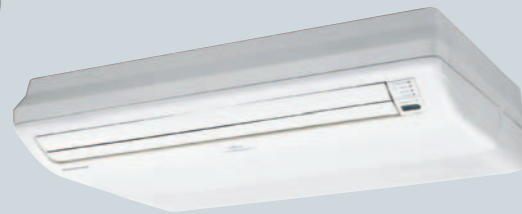

ABYG14LV ABYG18LV

Optional parts

Simple Remote Controller: UTY-RSNYM
Wired Remote Controller: UTY-RNNYM
External Connect Kit: UTY-XWZX

INVERTER Compact Cassette

- Powerful wide airflow
& Quiet operation



Wireless R.C.

AUYG07LV AUYG09LV AUYG12LV
AUYG14LV AUYG18LV

Optional parts

Simple Remote Controller: UTY-RSNYM
Wired Remote Controller: UTY-RNNYM
Grill Kit: UTG-UFYD-W
Air Outlet Shutter Plate: UTR-YDZB
Insulation Kit For High Humidity: UTZ-KXGC
Fresh Air Intake Kit: UTZ-VXAA
External Connect Kit: UTY-XWZX

Specifications of all indoor units

SPECIFICATIONS (WALL MOUNTED TYPE)

Model No.	Indoor unit	ASYG07LJ	ASYG09LJ	ASYG12LJ	ASYG18LF	ASYG24LF
kW Class	kW	2.0	2.5	3.5	5.0	7.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Noise	Cooling	36/32/29/21	37/33/29/21	40/36/30/21	43/37/33/26	49/42/37/33
	Heating	36/32/29/22	37/33/29/22	40/36/31/22	42/37/33/25	48/42/37/33
Air Flow	Cooling	560/500/430/340	600/520/430/340	660/560/450/340	900/740/620/550	1120/900/740/620
	Heating	560/500/430/350	600/520/430/350	660/560/470/350	900/740/620/550	1100/900/740/620
Net Dimension	mm	280x790x203	280x790x203	280x790x203	320x998x238	320x998x238
Weight	kg(lbs)	8(17.6)	8(17.6)	8(17.6)	14(30.8)	14(30.8)
Pipe Size	Liquid/Gas	mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø15.88

SPECIFICATIONS (FLOOR TYPE)

Model No.	Indoor unit	AGYG09LV	AGYG12LV	AGYG14LV
kW Class	kW	2.5	3.5	4.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50
Noise	Cooling	39/34/28/22	42/36/30/22	44/38/31/22
	Heating	39/35/30/22	42/38/32/22	44/39/33/22
Air Flow	Cooling	530/440/360/270	600/490/380/270	650/520/400/270
	Heating	530/460/380/270	600/510/410/270	650/540/430/270
Net Dimension	mm	600x740x200	600x740x200	600x740x200
Weight	kg(lbs)	14(30.7)	14(30.7)	14(30.7)
Pipe Size	Liquid/Gas	mm	Ø6.35/Ø9.52	Ø6.35/Ø12.7

SPECIFICATIONS (FLOOR/CEILING TYPE)

Model No.	Indoor unit	ABYG14LV	ABYG18LV
kW Class	kW	4.0	5.0
Power Source	V/Ø/Hz	230/1/50	230/1/50
Noise	Cooling	36/34/33/29(Under ceiling) 39/37/36/32(Floor console)	41/38/34/32(Under ceiling) 44/41/37/35(Floor console)
	Heating	36/34/33/29(Under ceiling) 39/37/36/32(Floor console)	41/38/34/32(Under ceiling) 44/41/37/35(Floor console)
Air Flow	Cooling	640/590/540/480	780/700/560/500
	Heating	640/590/540/480	780/700/560/500
Net Dimension	mm	199x990x655	199x990x655
Weight	kg(lbs)	27(60)	27(60)
Pipe Size	Liquid/Gas	mm	Ø6.35/Ø12.7

SPECIFICATIONS (COMPACT CASSETTE TYPE)

Model No.	Indoor unit	AUYG07LV	AUYG09LV	AUYG12LV	AUYG14LV	AUYG18LV
kW Class	kW	2.0	2.5	3.5	4.0	5.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Noise	Cooling	33/31/29/27	33/31/29/27	37/33/31/28	40/35/32/29	42/37/33/29
	Heating	34/32/29/27	34/32/29/27	37/33/31/28	40/37/34/29	44/40/37/30
Air Flow	Cooling	540/490/440/390	540/490/440/390	610/530/470/410	680/580/490/410	750/610/520/410
	Heating	540/490/440/390	540/490/440/390	610/530/470/410	700/620/550/430	800/710/600/450
Net Dimension	mm	245x570x570	245x570x570	245x570x570	245x570x570	245x570x570
Weight	kg(lbs)	15(33.1)	15(33.1)	15(33.1)	15(33.1)	15(33.1)
Panel				UTG-UFYD-W		
Pipe Size	Liquid/Gas	mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø12.7

SPECIFICATIONS (SLIM DUCT TYPE)

Model No.	Indoor unit	ARYG07LL	ARYG09LL	ARYG12LL	ARYG14LL	ARYG18LL
kW Class	kW	2.0	2.5	3.5	4.0	5.0
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Noise	Cooling	28/26/25/24	28/27/26/25	29/28/27/26	32/30/28/26	32/31/30/29
	Heating	28/26/25/24	28/26/25/24	29/28/27/24	33/30/28/25	33/32/31/29
Air Flow	Cooling	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
	Heating	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
Net Dimension	mm	198x700x620	198x700x620	198x700x620	198x700x620	198x900x620
Weight	kg(lbs)	17(37.5)	19(41.8)	19(41.8)	19(41.8)	23(50.6)
Pipe Size	Liquid/Gas	mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø12.7
External static pressure				0 to 90		
Drain pump				Standard		